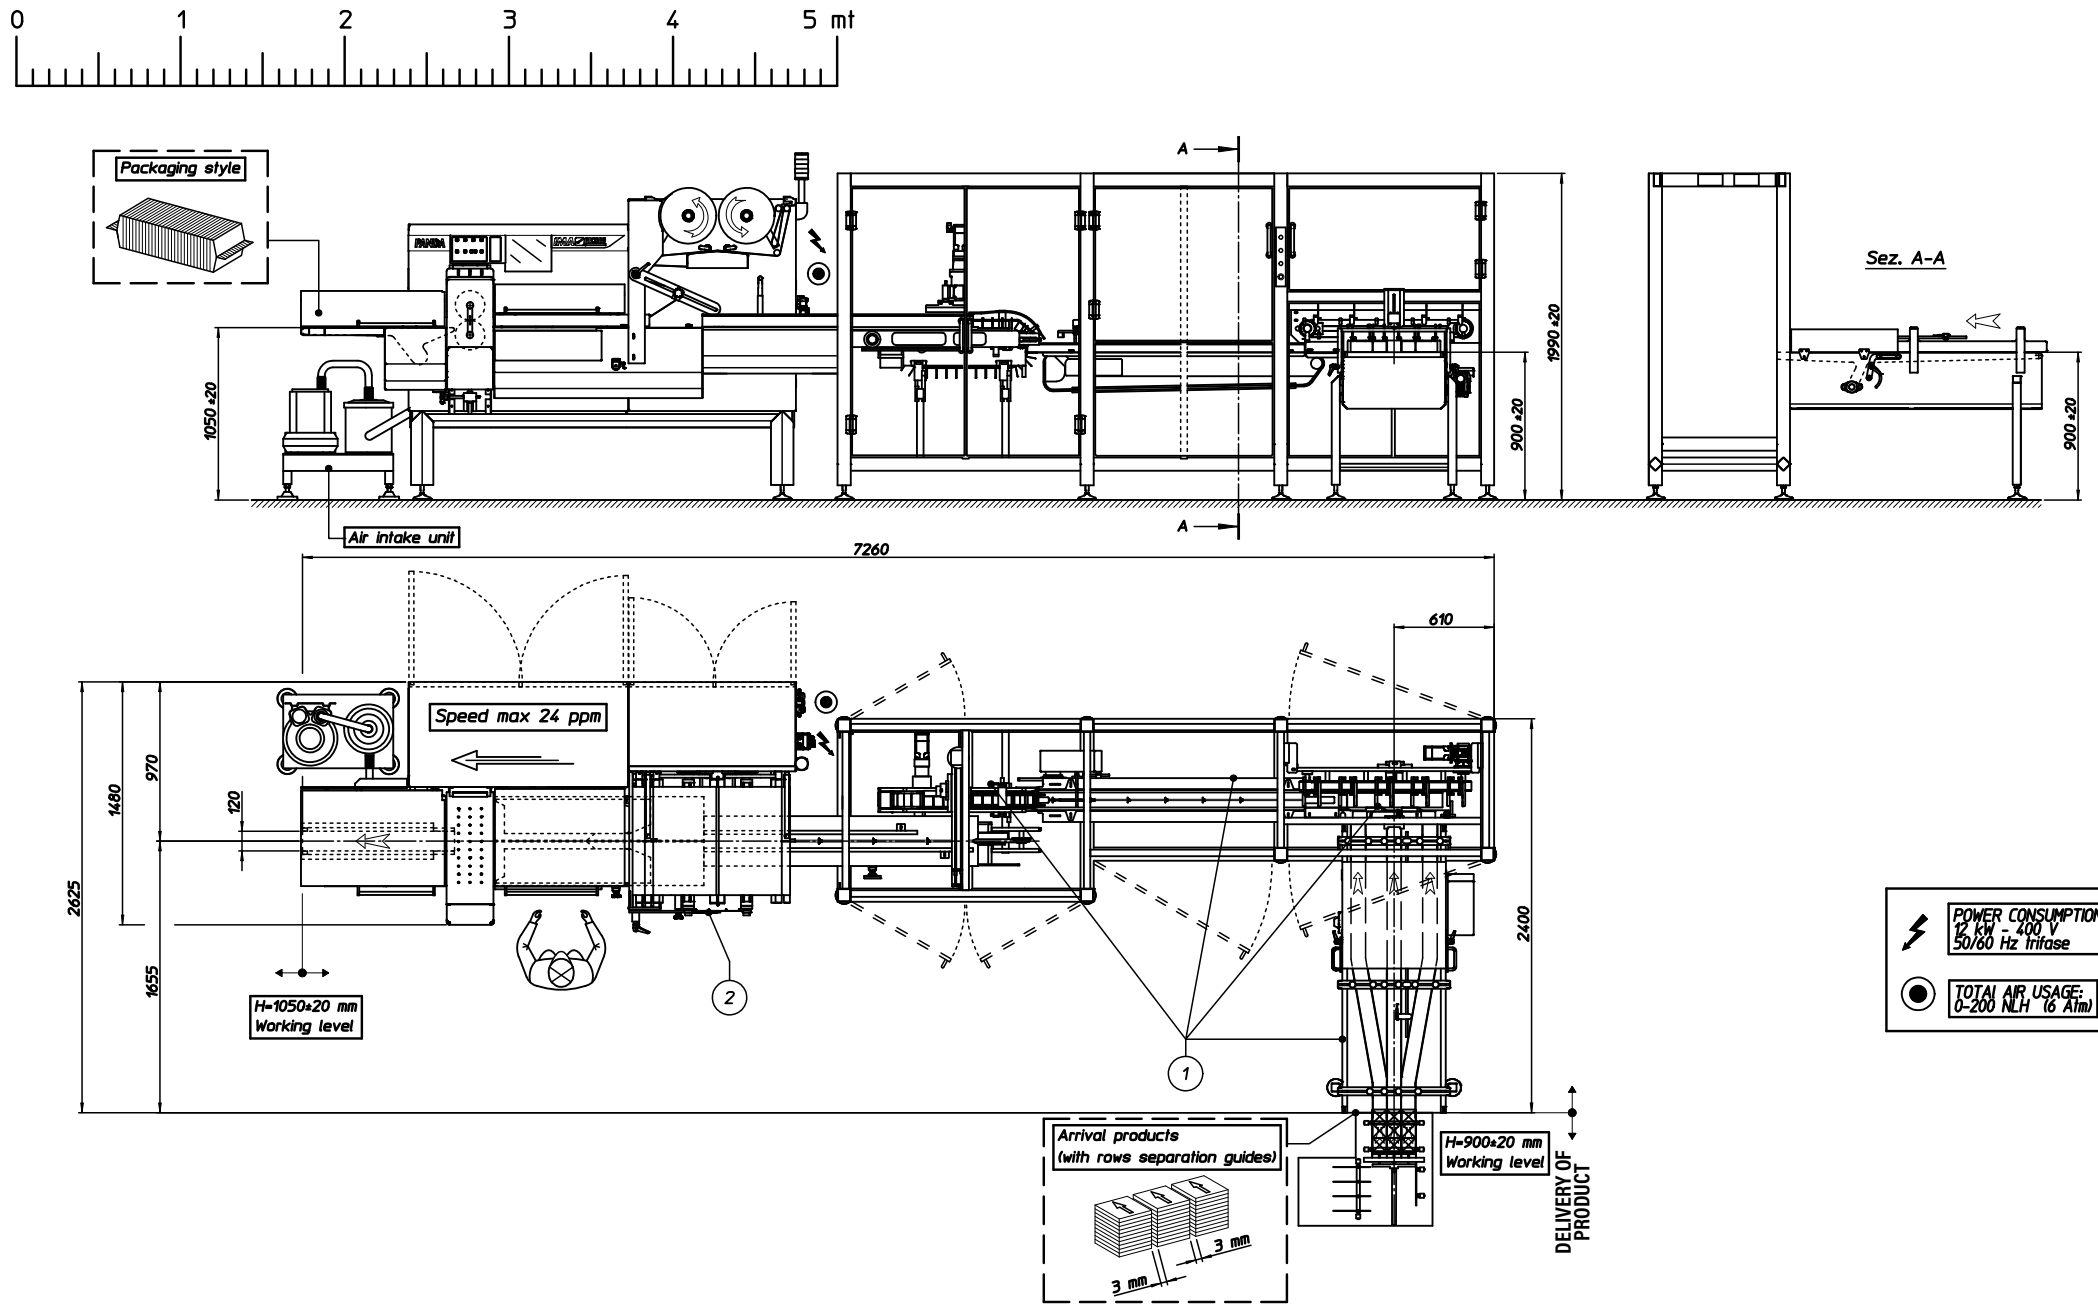
0 1 2 3 4 5 mt
Packaging style
A
A
1990 ±20
900 ±20
1050 ±20
Sez. A-A
900 ±20
Air intake unit
7260
610
Speed max 24 ppm
2625
1480
970
120
1655
H=1050±20 mm
Working level
2
1
2400
POWER CONSUMPTION:
12 kW - 400 V
50/60 Hz trifase
TOTAL AIR USAGE:
0-200 NLH (6 Atm)
Arrival products
(with rows separation guides)
3 mm
3 mm
H=900±20 mm
Working level
DELIVERY OF
PRODUCT